

PK- TD01001 Packing Instructions

Shipper must ensure compatibility with all packaging materials and follow all appropriate transport regulations. For air shipment of liquids, containers must meet pressure, secondary closure and leak-proof liner requirements (**See IATA DGR Section 5 / ICAO TI Section 4**). Deviations from any part of this instruction may void the UN certification. Please consult 49 CFR for United States record retention requirement. If further information is required, contact ICC The Compliance Center Inc at 1-888-442-9628.

Packing Components

Item	Description	Qty.
BX-TD01001	Outer Box	1
IN-TD01001	Assembled Partition	1
IN-TD01002	Top or Bottom crush pad	2

Packaging components completing this assembly supplied separately

Automotive Airbags	Explosive automotive airbags	Qty. 3 or 6
PA-MSST1	3M # 305 48mm clear tape or equivalent	

Important Information

Each assembled package must not exceed a gross weight of	14kg/30.86lb
--	--------------

Assembly

1. Set up outer box by folding the bottom flaps. Seal center seam of box with one (1) strip of 48mm wide, 3M #305 clear packing tape or equivalent. Extend tape beyond each edge by at least 2" (Figure 2).
2. Place Bottom crush pad in the box and then insert the assembled partition. (Figure 3)
3. Place the six airbags in the cells of the assembled partition as shown in figure 4. If shipping 3 side impact airbags, remove the center piece of the assembled partition and place the 3 airbags in the assembled partition as shown in figure 5.
4. Place the top crush pad in the box as shown in figure 6.
5. Fold top box flaps and seal center seam as described above in step one (Figure 7).
6. Mark and label each package in accordance with the appropriate regulations. At least one (1) set of UN markings and two (2) orientation arrows must be shown on each package.

Figure 1.

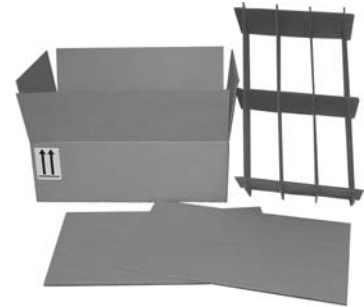


Figure 2.



Figure 3.



Figure 4.



Figure 5



Figure 6



Figure 7

