

## PK- N4PTC Packing Instructions

Shipper must ensure compatibility with all packaging materials and follow all appropriate transport regulations. For air shipment of liquids, containers must meet pressure, secondary closure and leak-proof liner requirements (**See IATA DGR Section 5 / ICAO TI Section 4 / US 49 CFR 173.27**). Deviations from any part of this instruction may void the UN certification. Please consult 49 CFR for United States record retention requirement. If further information is required, contact ICC Compliance Center at 1-888-442-9628.

### Packing Components

Item	Description	Qty.
BX-32	Die-cut outer box	1
IN-PINT1	1x1 Pint Insert	4
MT-PCPNT	Pint Size Paint Can with Lid	4
RL-CJ9	Pint Ringlok	4 or
MT-PCCLIPS	Metal Paint Can Clips	6 per can



### Packaging Components completing this assembly supplied separately


PA-MSST4	3M # 375 48mm clear tape
----------	--------------------------

### Important Information

Each assembled package must not exceed a gross weight of	10.3kg/22.7lb
Maximum Specific Gravity of Liquids	1.6

### Assembly

1. Fold in bottom box flaps (Figure 1). Flap-ends will create four individual cells inside the box. Seal the bottom center box seam with two (2) strips of 3M #375,48mm clear tape. Extend tape beyond each edge by at least 2". The tape strips run together overlapping side by side by .5".
2. Do not completely fill each can with liquid. Allow sufficient ullage for liquid expansion.
3. Using a paint can closer, secure one lid completely and evenly on each can.
4. Secure six (6) metal clips spaced evenly apart or one (1) sealing ring on the can/lid assembly (See page 2 for instructions). Make sure sealing ring snaps completely and evenly in place. For metal clips, place "double hook" end of clips over outer rim of can.
5. Assemble/fold (4) inserts and place one insert into each cell of the box (See figure 3).
6. Place one can assembly in an upright position in each insert of the box (See figure 4).
7. Fold box flaps with flap-ends separating all cans (See figure 5). Fold and seal center seam as described in step 1 above (See figure 6).
8. Mark and label each package in accordance with the appropriate regulations.

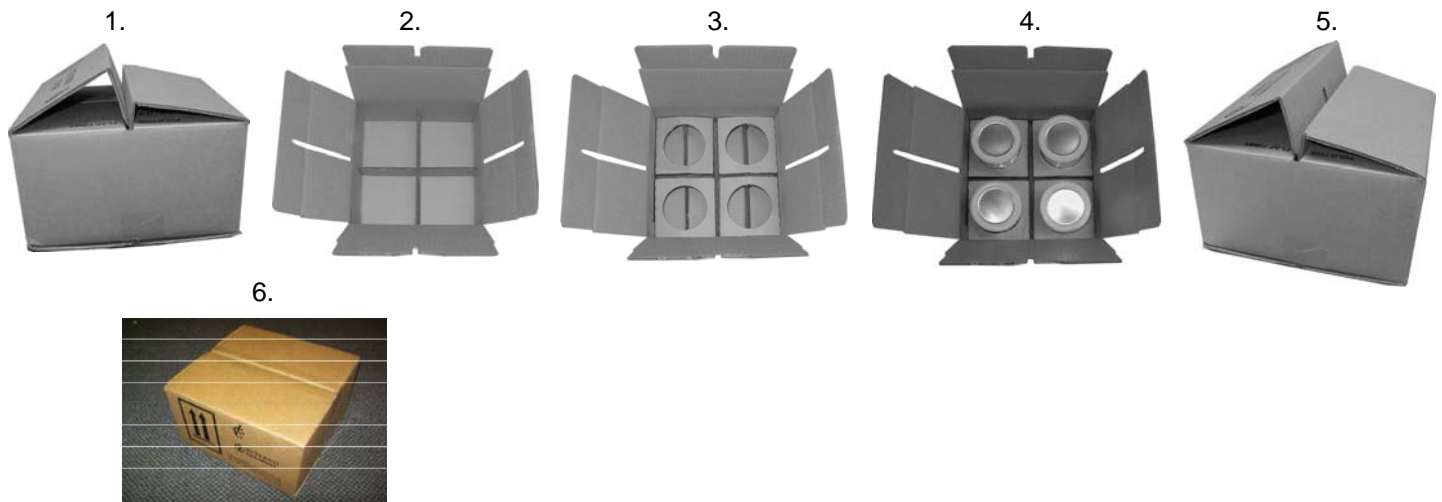

## Ringlok® Instructions (RL-CJ7 & RL-CJ8)

### ASSEMBLY



1 Place the Ringlok® on the paint can.



2 Using the palms of both hands, concentrate on one end of the ring and press firmly. (This will result in the ring hooking the outer rim of can.)

3 Using palms of both hands, continue to "firmly" press the ring into place and work both hands around the perimeter, until the ring is completely applied.

4 The ring is properly applied when the ring hooks below the can's rim completely around the perimeter.

### REMOVAL



1 Pry the ring in an upward position using two thumbs concentrated on one area until the ring releases from the can's rim.



#### USA

Cleveland  
Niagara Falls  
Houston

USA Customer Service  
Tel: 888-442-8628

#### CANADA

Edmonton  
Montreal  
Toronto  
Vancouver

Canada Customer Service  
Tel: 888-977-4834

[www.thecompliancecenter.com](http://www.thecompliancecenter.com)